SLIDING GATE GUIDE POST DETAIL

28   20   28

25

5

11.5

SLIDING GATE TRACK

STANDARD F STOP ALTERNATIVE POV

Commercial F Stop

Commercial Grade Motor

SLIDING GATE TRACK
Double the gate length

600mm

CONCRETE MOTOR PAD

EXISITING DRIVEWAY

If driveway is not existing, concrete strip must also
run the whole width of driveway

100-125mm

GATE STOP
Floor Mounted

CONCRETE STRIP & MOTOR PAD
SHOULD BE AT LEAST 120MM DEEP

200mm

200mm

400mm

ROAD SIDE

200mm

Double Tunnel Post
(75 x 75mm or 100 x 100mm)

300mm

Double Tunnel Post
(75 x 75mm or 100 x 100mm)

CONCRETE STRIP
Must equal minimum gate width + 400mm
(to account for 400mm guide rail and motor tail)

Additional Double Tunnel Post (75 x 75mm or 100 x 100mm)
Only used for gates longer than 6 metres

SLIDING GATE SETUP - TOP VIEW

150mm

400mm

150mm

STANDARD F STOP

35

115

35

27

ø5

ø15

76

10

18

185

2.5   2.5
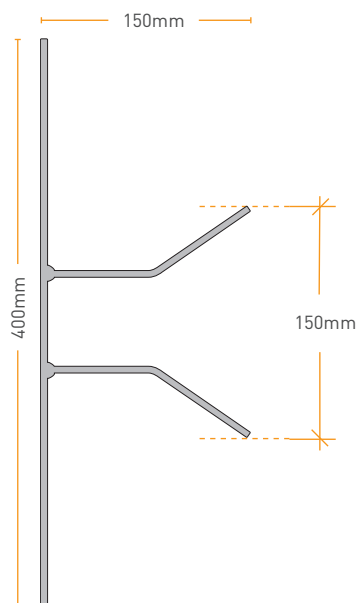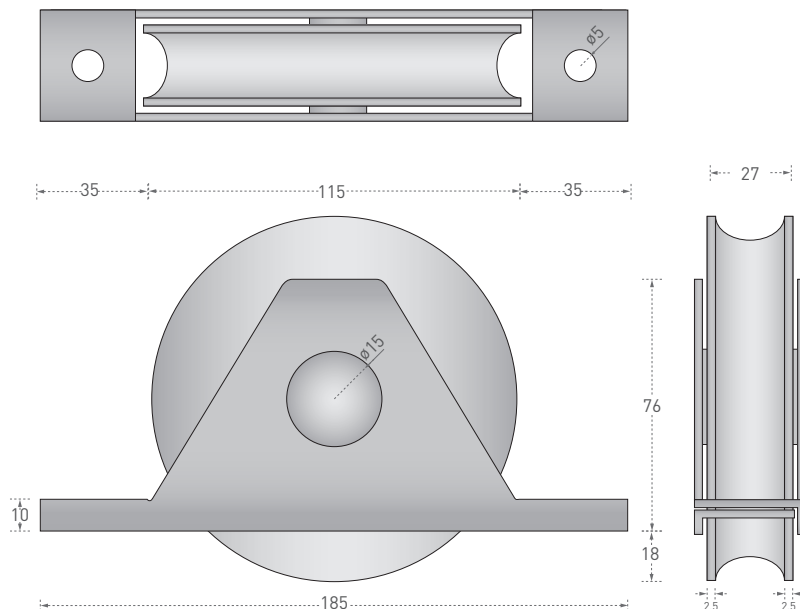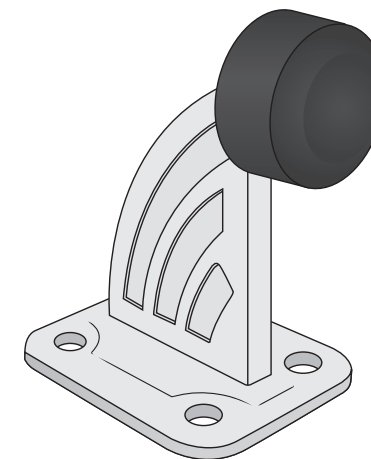
SLIDING GATE WHEEL

82

26

21   40   21

300
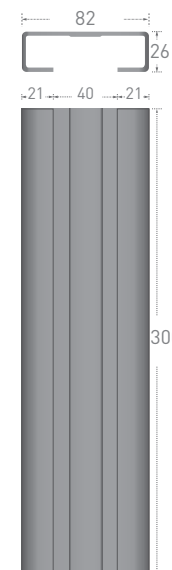
GUIDE CHANNEL

GUIDE CHANNEL BLOCK